


### RE-ADJUSTABLE COMPRESSION FITTINGS



#### Stainless Steel with FEP Ferrule

CODE	TUBE SIZE (inches)	PROCESS THREAD (inches)	LENGTH (inches)
6109T-1A	1/16 O.D.	1/8 NPT	1 1/4
6109T-2A	1/8 O.D.	1/8 NPT	1 1/4
6109T-3A	3/16 O.D.	1/8 NPT	1 1/4
6109T-4B	1/4 O.D.	1/4 NPT	2 1/2
6109T-6B	3/8 O.D.	1/4 NPT	2 1/2
6109T-4C	1/4 O.D.	1/2 NPT	2 1/2
6109T-6C	3/8 O.D.	1/2 NPT	2 1/2

#### Brass with FEP Ferrule

CODE	TUBE SIZE (inches)	PROCESS THREAD (inches)	LENGTH (inches)
6122T-1A	1/16 O.D.	1/8 NPT	1
6122T-2A	1/8 O.D.	1/8 NPT	1 1/4
6122T-3A	3/16 O.D.	1/8 NPT	1 1/4
6122T-2B	1/8 O.D.	1/4 NPT	1 3/8
6122T-3B	3/16 O.D.	1/4 NPT	1 1/2
6122T-4B	1/4 O.D.	1/4 NPT	1 1/2
6122T-6B	3/8 O.D.	1/4 NPT	1 9/16
6122T-4C	1/4 O.D.	1/2 NPT	1 13/16
6122T-6C	3/8 O.D.	1/2 NPT	1 13/16

#### Stainless Steel Re-Adjustable Spring-Loaded Well Fittings with FEP Ferrule


CODE	TUBE SIZE (inches)	PROCESS THREAD (inches)	LENGTH (inches)
6109TSL-3C	3/16 O.D.	1/2 NPT	2 3/8
6109TSL-4C	1/4 O.D.	1/2 NPT	2 3/8

#### Ferrule Temperature Ratings

CODE	MATERIAL	MAX. TEMP.
T	FEP	450 °F
L	Lava	1600 °F

Substitute ferrule code L for the letter T for fittings supplied with other than FEP ferrules.

### ONE-TIME ADJUSTABLE COMPRESSION FITTINGS

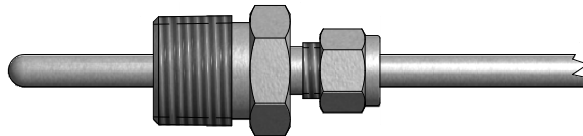

#### Stainless Steel with SS Ferrule

CODE	TUBE SIZE (inches)	PROCESS THREAD (inches)	LENGTH (inches)
6009-1A	1/16 O.D.	1/8 NPT	1 1/4
6009-2A	1/8 O.D.	1/8 NPT	1 1/4
6009-3A	3/16 O.D.	1/8 NPT	1 1/4
6009-4A	1/4 O.D.	1/8 NPT	1 1/4
6008-2B	1/8 O.D.	1/4 NPT	1 7/16
6008-3B	3/16 O.D.	1/4 NPT	1 1/2
6008-4B	1/4 O.D.	1/4 NPT	1 9/16
6008-6B	3/8 O.D.	1/4 NPT	1 5/8
6008-2C	1/8 O.D.	1/2 NPT	1 5/8
6008-4C	1/4 O.D.	1/2 NPT	1 3/4
6008-6C	3/8 O.D.	1/2 NPT	1 7/8

#### Brass with Brass Ferrule

CODE	TUBE SIZE (inches)	PROCESS THREAD (inches)	LENGTH (inches)
6022-2A	1/8 O.D.	1/8 NPT	1 1/16
6022-3A	3/16 O.D.	1/8 NPT	1 1/16
6022-4A	1/4 O.D.	1/8 NPT	1 3/16
6022-3B	3/16 O.D.	1/4 NPT	1 3/16
6022-4B	1/4 O.D.	1/4 NPT	1 1/4
6022-6B	3/8 O.D.	1/4 NPT	1 5/16
6022-4C	1/4 O.D.	1/2 NPT	1 3/8
6022-6C	3/8 O.D.	1/2 NPT	1 1/2